Operating Instruction - Pivoting bottom rack

Lock loop
GP-B

Lock loop
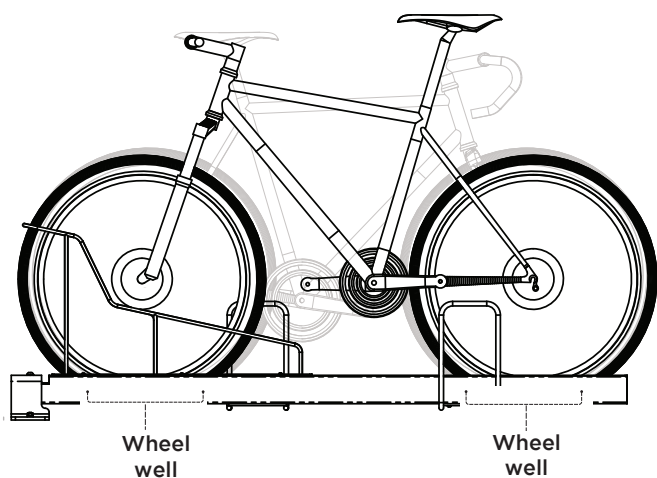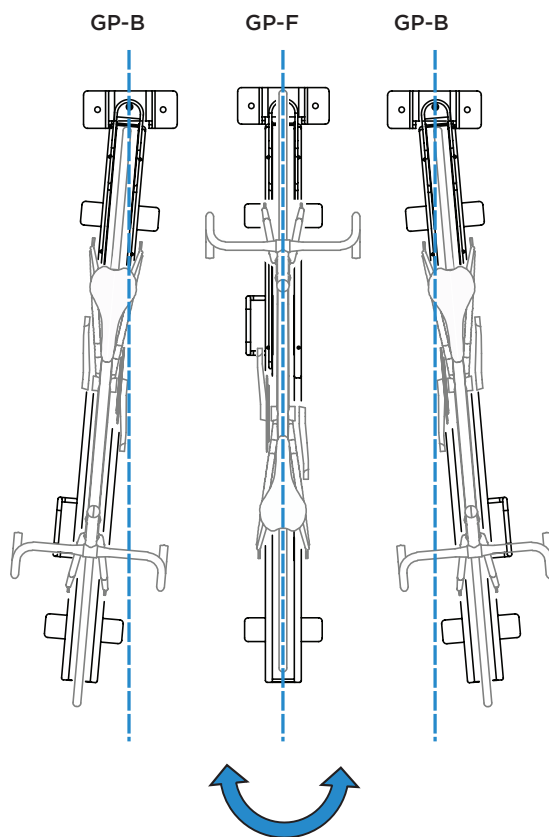GP-F

GP-B

GP-F
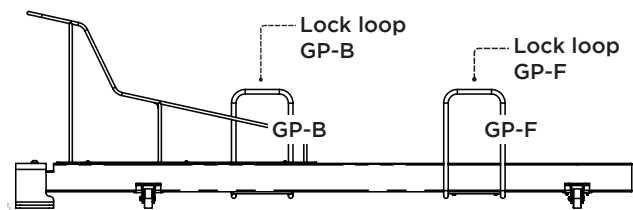
1 Choose either the **GP-B** or **GP-F**
GP-B - Back wheel in first
GP-F - Front wheel in first

GP-B   GP-F   GP-B

2 Racks can be pivoted to increase access for racking or removal.

Wheel
well

Wheel
well

3 Place bike within the wheel wells, front or rear wheel first depending on rack selected. Secure bike to locking loop using personal locking device. For security reasons CORA recommends the lock passes through the bike frame.